

Hot Laminator (High Speed) TIKO CORPORATION LTD.



Up to A3 size



Design for
75 - 250 micron
Pouch



1 mm
Max. Thickness



30 min.
Auto
Shutdown



Anti-Jam
Function



Auto Delivery
System



Digital Control



1 Minute
Ready



A4 Lamination
in 9 Sec.



AGILITY A3
AL 3601

You **use it**, You **like it**!

Special Features

1 Minute Ready and the **High Lamination Speed** means you can finish your work faster.

Digital Speed Control allows fast and simple set up. The user friendly control panel provides predefined speed setting for different pouch and paper type. Perfect lamination quality could be achieved easily under your finger tip.

Anti-Jam Function makes this a jam-free laminator. The laminator will be reversed automatically when a possible jam is detected.

The Auto Delivery System (ADS) delivers the laminate out of the laminator automatically. It is unnecessary for the user to remove the laminate manually when the laminate is still hot. Moreover, the laminator exit will always be cleared which prevents the blocking of the exit passage owing to accumulated laminates. This also improves the flatness of the laminate as it will be lying perfectly on a flat surface.


Specifications	AGILITY A3
Max. Laminating Width	320 mm
Max. Laminating Speed	2000 mm per min. (at 75 micron)
Max. Laminating Thickness	1.0 mm
Pouch Film Thickness	75 - 250 micron per side
Number of Roller	6 Rollers
Pre-heat Time	~ 1 minute
Voltage	AC120 , AC220 - 240V (50/60 Hz)
Consumption Power	1750 W
Weight	4.1Kg
Dimensions (W x D x H)	525 x 364 x 127 mm

* Specifications are subject to change without prior notice.



Hot Laminator

TIKO CORPORATION LTD.

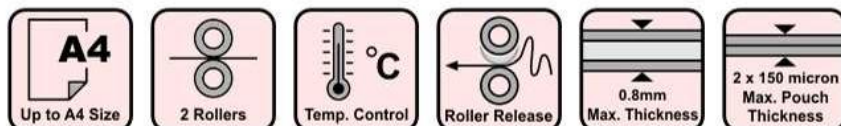

AL4201

You use it, You like it!

Special Features

Temperature Control allows correct temperature to be set for different pouch thickness.

Roller Release Button helps user to remove the pouch when it is being fed incorrectly.




Specifications

Max. Laminating Width	230 mm (9 inches)
Laminating Speed	295 mm (11.6 inches) per min.
Max. Laminating Thickness	0.8 mm (32 mil)
Pouch Film Thickness	75 - 150 micron (3 - 6 mil) per side
Jammed Paper Release	Roller Release Button
Number of Roller	2 Rollers
Heating System	Hot Shoe
Pre-heat Time	~ 5 minutes
Carrier	Free
Voltage	AC120, AC220 - 240V (50/60Hz)
Consumption Power	240 W
Weight	2.3 Kg
Dimensions (W x D x H)	364 x 182 x 106 mm (14.3 x 7.2 x 4.2 inches)
Body Material	ABS
Safety	CE, UL, C-UL
* Specifications are subject to change without prior notice.	



Hot Laminator

TIKO CORPORATION LTD.



ACTION A4
model AL4204

ACTION A3
model AL3203

You use it, You like it!

Special Features

Short pre-heat time reduces user's waiting time.

Real time pouch thickness selector allows instant setting change among different pouch thicknesses.

Power cord storage compartment provides tidy cable storage. (Not applicable for UK plug)

Precise temperature control delivers stable roller temperature which creates the best lamination quality.

Unique housing design minimizes heat loss to surrounding which is more environmental friendly.

Robust construction ensures durable faultless operation.

Specifications	ACTION A4	ACTION A3
Max. Lamination Width	230 mm	320 mm
Max. Lamination Speed	310 mm per min.	
Max. Lamination Thickness	0.6mm	
Pouch Film Thickness	50 - 125 micron per side	
Jammed Paper Release	Roller Release Button	
Number of Roller	2 Rollers	
Pre-heat Time	~ 3 minutes	
Voltage	AC120 , AC220 - 240V (50/60 Hz)	
Consumption Power	250 W	375 W
Weight	1.4 Kg	1.9 Kg
Dimensions (W x D x H)	393 x 121 x 87 mm	498 x 127 x 88 mm

* Specifications are subject to change without prior notice.

